
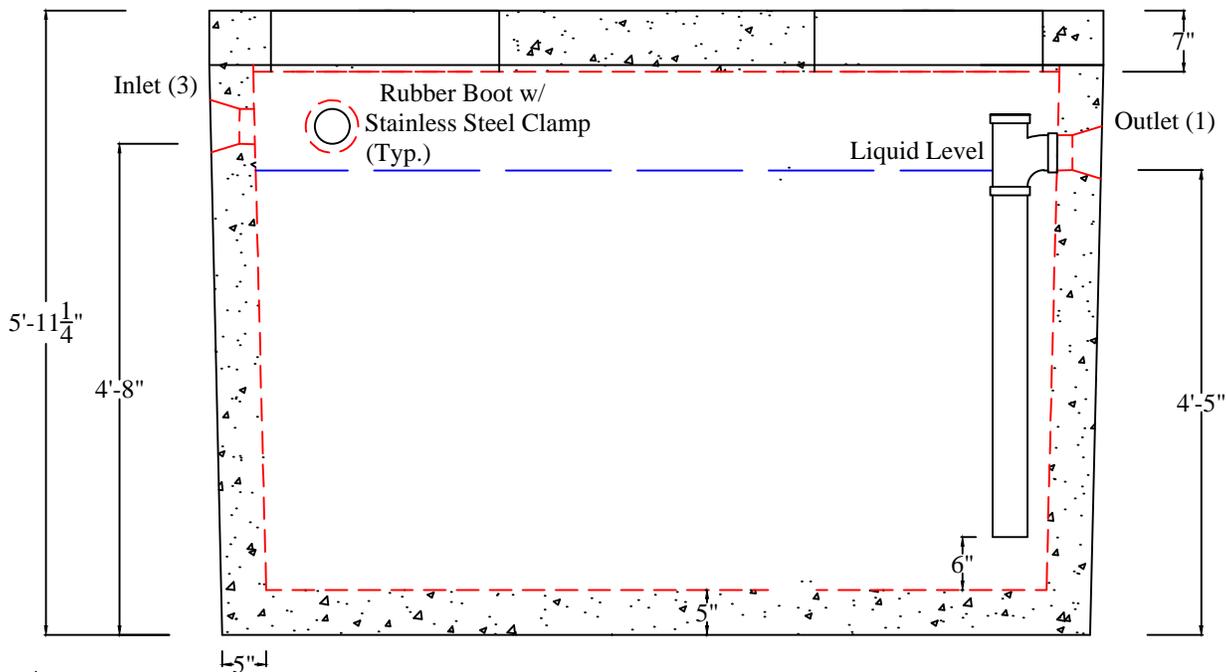


J.B. CONCRETE PRODUCTS, INC.

1000 GAL H-20 OIL/WATER SEPARATOR

REV. DATE:
MAR. 1, 2012

Drawing I.D.
ST_1000H20_OIL

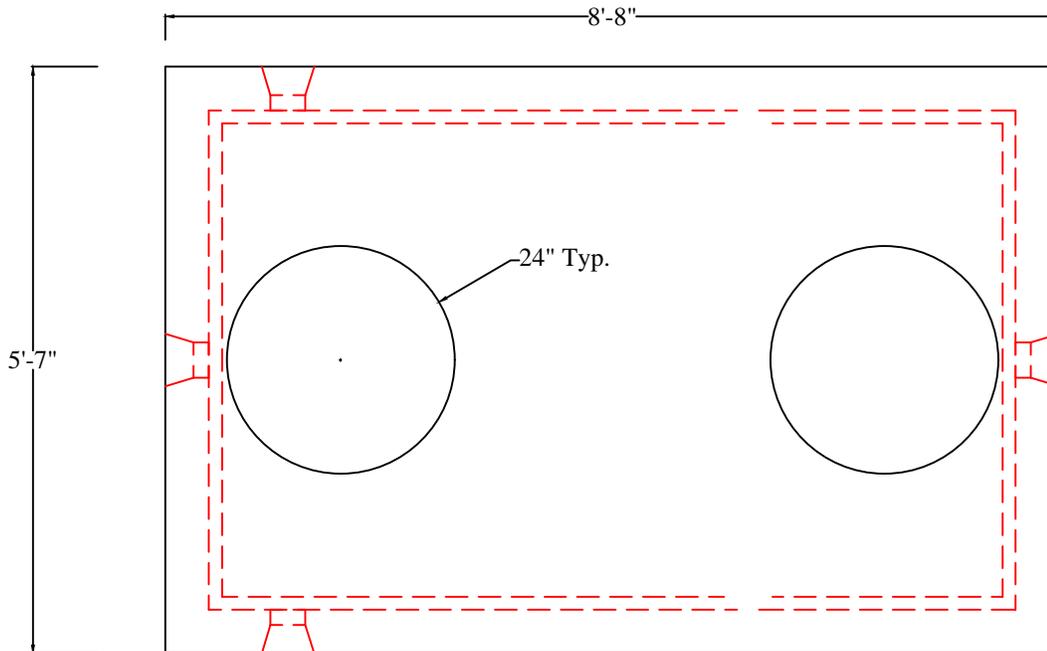

Notes:

1. MONOLITHIC DESIGN
2. TOP JOINT ABOVE LIQUID LEVEL SEALED W/ PETROLEUM RESISTANT SEALANT
3. INTERIOR COATED W/ PETROLEUM RESISTANT EPOXY
4. EXTERIOR COATED W/ CONCRETE WATERPROOFING SEALANT
5. INLET/OUTLET BOOTS 4" OR 6"
6. OUTLET 'T' BAFFLE' SUPPLIED BY OTHERS
7. MEETS H-20 WHEEL LOAD REQUIREMENTS
8. MINIMUM CONCRETE STRENGTH 5000 PSI AFTER 28 DAYS.

1 Arch St
PO Box 387
Putnam, CT 06260
(860)928-9365
F (860)928-9452
www.jbconcreteproducts.com